




LIBRASCOPE engineering data

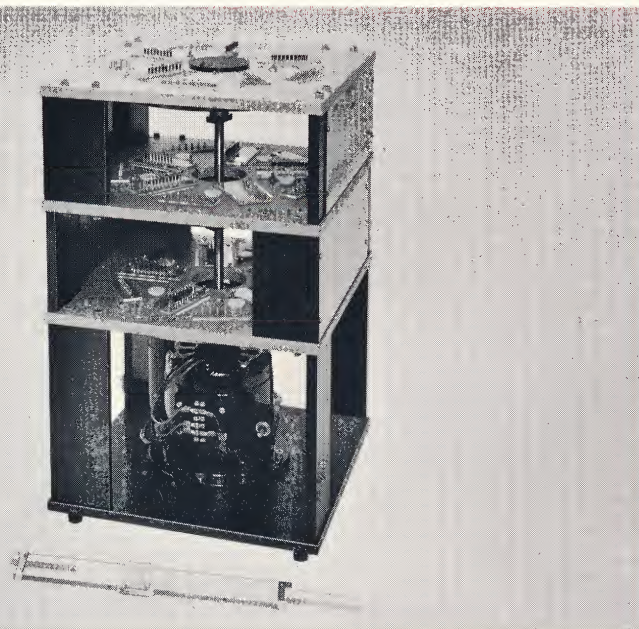

MODEL L-323


random- access disc memory

DESCRIPTION—Librascope random-access disc memories can be used to provide data storage and transfer in a wide variety of computer systems and peripheral equipment or wherever rapid-access memory is a system requirement. They feature a flying head per track and a nonwearing, plated cobalt recording surface, providing superlative magnetic performance under all conditions of operation. The Model L-323 magnetic storage discs are stacked in a compact assembly of three and have a maximum capacity of 1,000,000 bits and are available with an average access time of either 17 or 25 milliseconds.

SPECIAL FEATURES — The superior but simplified disc and head design results in more efficient packaging than has previously been available and in a lower-cost product. The recording disc surfaces, plated with a cobalt coating, are smooth and long-wearing, unaffected by multiple start-and-stop operations. The flying head is in contact with the metallic recording surface when the disc is not rotating. The inherent hardness of the cobalt plating provides high resistance to abrasive wear and relative insensitivity to accidental damage.



All materials, fits, and design proportions of the basic structure are selected to compensate for the temperature differentials the disc assemblies may encounter in storage and in operation. For strength, rigidity, and lightness of weight, all discs and supporting structures are made of aluminum.

APPLICATIONS—Random-access disc memories are used in computer systems and peripheral equipment as the main storage or buffer storage, or they supplement other memory. In a typical computer system, the magnetic disc memory provides an inexpensive, rapid-access, reliable storage with sufficient capacity for many programs. In peripheral equipment, such as visual computer displays, they make possible a constant (no-flicker) variable-size display.

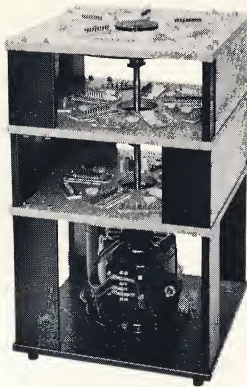

MODEL L-323

random- access disc memory

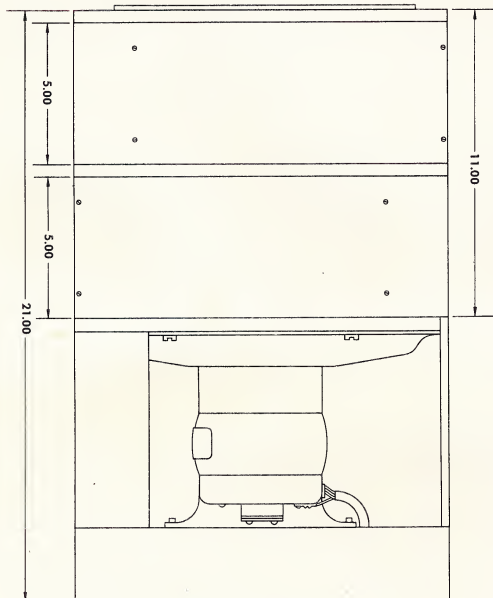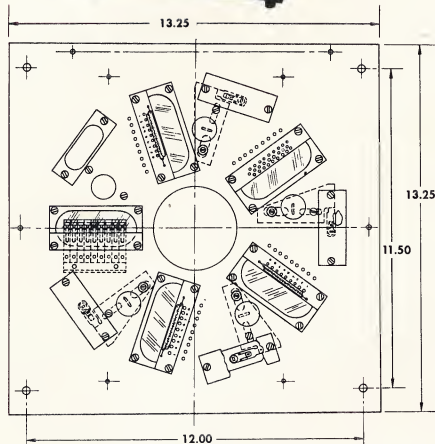

MEMORY UNIT ASSEMBLY

GENERAL CHARACTERISTICS

Power requirements	115-volt, 60-cycle, single-phase AC
Disc diameter	10 in.
Weight	60 lb.
Axis of rotation	Vert., horiz., or any combination
Recording diameters	4.7 in. to 9.2 in.
Number of tracks	135 (15 groups of 9)
Number of registers	12
Register length	0.25 or 0.5 in.
Register adjustment	± 0.018 in.
Bits per track (max.)	6800 pm recording
Track width	0.034 in.
Tracks per inch	20
Capacity (total)	1,000,000 bits
Packing density (max.)	400 bits/in. at 4.7 in. dia.
Rotational speed	1200 or 1800 rpm
Frequency (repetition rate)	204kc (max.)
Recording surface	Proprietary plated cobalt
Head spacing	Flying head
Head inductance (typical)	1 mh/half coil
Write current (typical)	28 ma
Readback voltage (typical)	
1200 rpm	180 mv (min.), inner track 340 mv (max.), outer track
Bearing life (average)	10 years

LIBRASCOPE GROUP


 **GENERAL
PRECISION**

COMMERCIAL COMPUTER DIVISION

808 WESTERN AVENUE • GLENDALE 1, CALIF.
Telephone: VI 9-6061



LIBRASCOPE engineering data

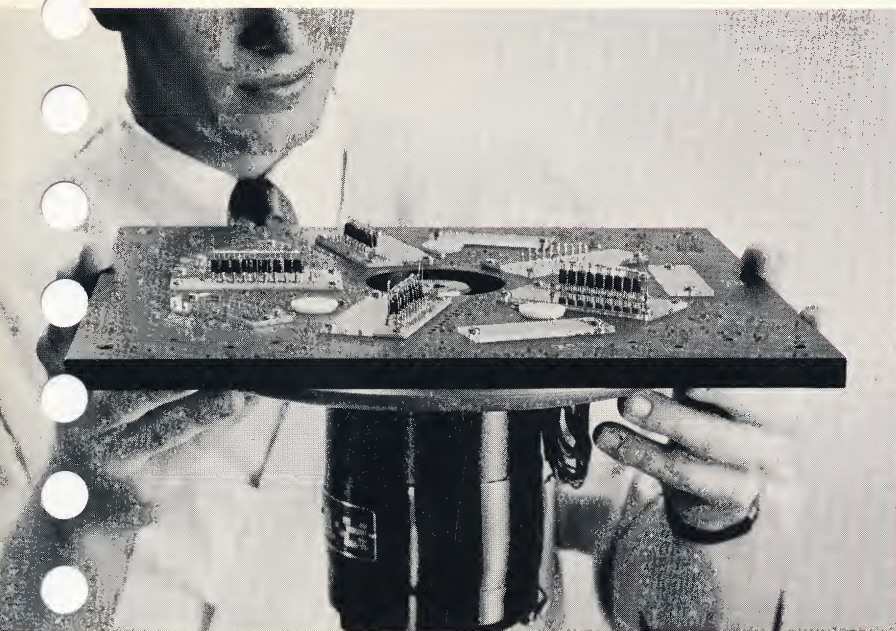

SERIES L-300


random- access disc memory

DESCRIPTION—Librascope random-access disc memories can be used to provide data storage and transfer in a wide variety of computer systems and peripheral equipment or wherever rapid-access memory is a system requirement. They feature a flying head per track and a nonwearing, plated cobalt recording surface, providing superlative magnetic performance under all conditions of operation. The Series L-300 magnetic storage discs have a maximum capacity of 275,000 bits and are available with an average access time of either 17 or 25 milliseconds.

SPECIAL FEATURES—The superior but simplified disc and head design results in more efficient packaging than has previously been available and in a lower-cost product. The recording disc surface, plated with a cobalt coating, is smooth and long-wearing, unaffected by multiple start-and-stop operations. The flying head is in contact with the metallic recording surface when the disc is not rotating. The inherent hardness of the cobalt plating provides high resistance to abrasive wear and relative insensitivity to accidental damage.

All materials, fits, and design proportions of the basic structure are selected to compensate for the temperature differentials the disc assemblies may encounter in storage and in operation. For strength, rigidity, and lightness of weight, all discs and supporting structures are made of aluminum.

APPLICATIONS—Random-access disc memories are used in computer systems and peripheral equipment as the main storage or buffer storage or they supplement other memory. In a typical computer system, the magnetic disc memory provides an inexpensive, rapid-access, reliable storage with sufficient capacity for many programs. In peripheral equipment such as visual computer displays, they make possible a constant (no-flicker) variable-size display.

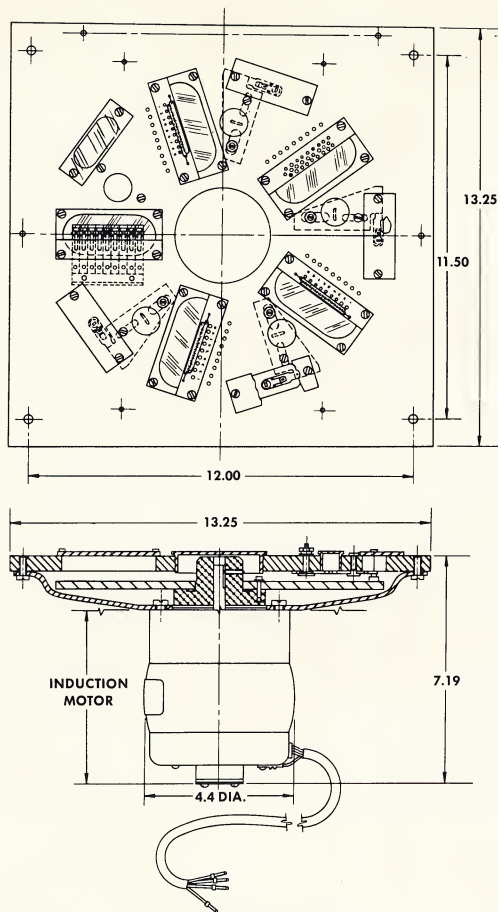

MEMORY UNIT ASSEMBLY

SERIES L-300

random- access disc memory

GENERAL CHARACTERISTICS


Power requirements	115-volt, 60-cycle, single-phase AC
Disc diameter	10 in.
Weight	25 lb.
Axis of rotation	Vert., horiz., or any combination
Recording diameters	4.7 in. to 9.2 in.
Number of tracks	45 (5 groups of 9)
Number of registers	4
Register length	0.25 or 0.5 in.
Register adjustment	± 0.018 in.
Bits per track (max.)	6144 pm recording
Track width	0.034 in.
Tracks per inch	20
Capacity (total)	276,480 bits
Packing density (max.)	400 bits/in. at 4.7 in. dia.
Rotational speed	1200 or 1800 rpm
Frequency (repetition rate)	184kc (max.)
Recording surface	Proprietary plated cobalt
Head spacing	Flying head
Head inductance (typical)	1 mh/half coil
Write current (typical)	28 ma
Readback voltage (typical)	1200 rpm .180 mv (min.), inner track 340 mv (max.), outer track
Bearing life (average)	10 years

OPERATION

When a disc is not rotating (a), the heads are held in contact with the metallic recording surface by a reed of bifurcated leaf springs whose tension, for each individual head, can be adjusted by clamping/adjusting screws. In the contact position, the low-friction surface prevents the heads from damaging the disc tracks.

When the disc rotates (b), the heads fly over the track, riding on an air cushion approximately 0.0001-inch thick. The design of the heads and their adjustable mountings is such that the head-to-disc gap remains constant during operation; the flying action of the heads automatically compensates for inherent variations in the run-out of the disc and for any unbalanced temperature differentials between the head mounting plate and recording surface of the disc.

Track access is controlled by addressing from electronic switching circuits, control logic circuits, and buffers that are wired to the heads.

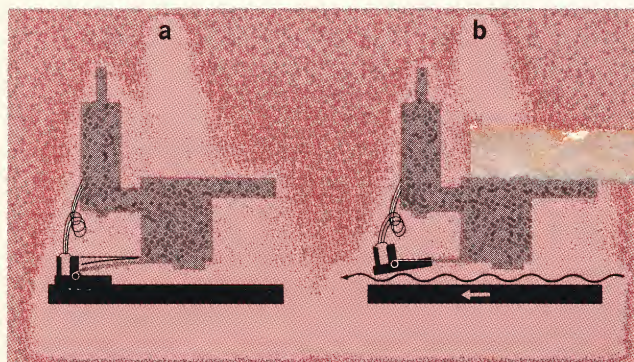

LIBRASCOPE GROUP

**GP GENERAL
PRECISION**

COMMERCIAL COMPUTER DIVISION

808 WESTERN AVENUE • GLENDALE 1, CALIF.
Telephone: VI 9-6061

Attention:

Public Relations Dept.

Mr. T. Nelson/ Systems Consultant
Box 1546
Poughkeepsie, N.Y.

THANK YOU FOR YOUR INTEREST IN GENERAL PRECISION.
Here is the literature you recently requested. If you wish further information,
please complete and return this postage-paid card.

SOURCE Datamation

LITERATURE ENCLOSED Memory Disc

DATE 2-19-65

No Postage Will Be
Necessary If Mailed
In The United States

BUSINESS REPLY MAIL

FIRST CLASS PERMIT No. 1726, GLENDALE, CALIFORNIA

Postage will be paid by —

LIBRASCOPE GROUP

General Precision, Inc.

808 Western Avenue

Glendale, California 91201

LIBRASCOPE GROUP CAPABILITIES

If you would like information on one of the items listed, check item and outline your requirements in space below.

COMPUTERS

- ☐ LGP 21 suitcase-sized computer
- ☐ LGP-30 desk-sized computer
- ☐ RPC 4000 medium scale computer
- ☐ L-2010 portable general purpose military computer

COMPUTER COMPONENTS

- ☐ Disc memories
- ☐ Drum memories
- ☐ Shaft position-to-digital encoders
- ☐ Sine-cosine mechanisms
- ☐ Ball and disc integrators
- ☐ Mechanical differentials
- ☐ Miniature servos and servoamplifiers

COMMAND AND CONTROL

- ☐ L-3055 large scale on-line system

SHIPBOARD SYSTEMS

- ☐ ASW
- ☐ Navigation
- ☐ Fire control
- ☐ Surveillance

GROUND WEAPONS SYSTEMS

- ☐ Navigation
- ☐ Fire control
- ☐ Weapon control

ORDNANCE

- ☐ Electronic ordnance
- ☐ Electroexplosive ordnance

OPTICS

- ☐ Grind, polish, test optical elements
- ☐ Optical system design

ADDITIONAL DATA REQUEST

Please send following technical/price information:

Application: _____

Please have an applications engineer contact me. My initial interest is for:

- ☐ IMMEDIATE APPLICATION ☐ FUTURE APPLICATION ☐ INFORMATION ONLY

(PLEASE COMPLETE THIS SECTION IF NOT INCLUDED IN YOUR ADDRESS)

COMPANY _____

DEPT. _____

TITLE OR RESPONSIBILITY _____